

Fitter studies



Marcin Chrząszcz
Nicola Serra
Elena Graverini




University of
Zurich ^{UZH}

$R(\Lambda_c^*)$ meeting, Zurich
May 20, 2016


Fitter

- ⇒ For now the default strategy is to use HistFactory as $R(D^*)$.
- ⇒ Managed to make this work just yesterday so this is VERY PRELIMINARY.
- ⇒ 1:1 $\tau : \mu$

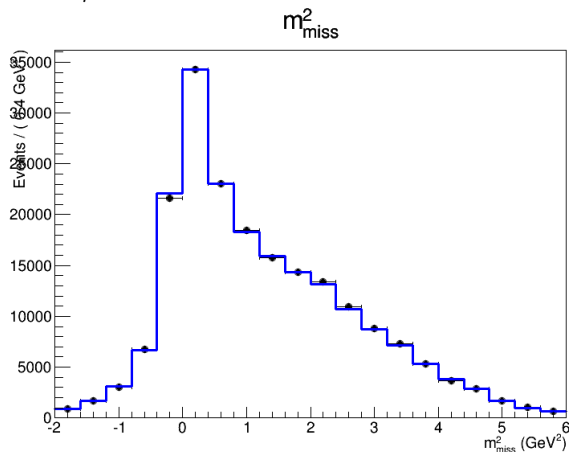

Fitter

- ⇒ For now the default strategy is to use HistFactory as $R(D^*)$.
- ⇒ Managed to make this work just yesterday so this is VERY PRELIMINARY.
- ⇒ 1:2 $\tau : \mu$

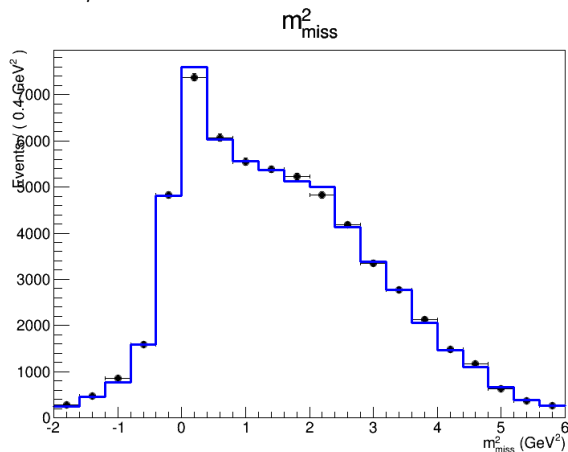

Fitter

- ⇒ For now the default strategy is to use HistFactory as $R(D^*)$.
- ⇒ Managed to make this work just yesterday so this is VERY PRELIMINARY.
- ⇒ 20:1 $\tau : \mu$

